


ASUS PA34VC



EAN:
4718017030250

Produkt Nummer:
90LM04A0-B01370

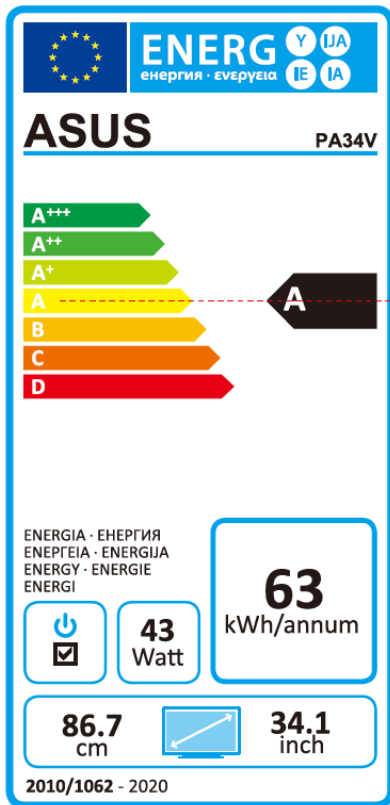

Highlights

- 86,61cm (34,1 Zoll) UWQHD 1900R IPS-Monitor mit rahmenlosem Design
- 100% sRGB-Farbraumabdeckung, ab Werk vorkalibriert für eine hervorragende Farbtreue
- Die HDR-10-Kompatibilität ermöglicht eine besonders dynamische und realistische Bilddarstellung
- Thunderbolt 3 USB-C für Datenübertragungsraten von bis zu 40Gbit/s und Power Delivery mit bis zu 60W Leistung für externe Geräte
- ASUS ProArt – Kalibrierungstechnologie bietet eine 14-Bit Look-Up-Tabelle (LUT), Uniformitätskompensation und die Möglichkeit, Farbprofile auf dem Monitor zu speichern

Spezifikationen

Display Panel Size: Wide Screen 34" (86.72cm) 21:9
Color Saturation : 100%(sRGB)
Panel Type : IPS
True Resolution : 3440x1440
Display Viewing Area(HxV) : 799.8 x 334.8 mm
Display Surface : Non-glare
Pixel Pitch : 0.2325 mm
Brightness : 300 cd/? (Typical)
Contrast Ratio : 1000 :1 (Typical)
Viewing Angle (CR?10) : 178°(H)/178°(V)
Response Time : 5ms (Gray to Gray)
Display Colors : 1073.7M (10bit)
Flicker free
LCD ZBD Warranty : Yes
Curved Panel : 1900R
HDR (High Dynamic Range) Support : Yes
Refresh Rate(max) : 100Hz

Video Feature Trace Free Technology : Yes
SPLENDID Video Preset Modes : 9 Modes (HDR/sRGB Mode/Rec. 709 Mode/Scenery Mode/Standard Mode/User Mode 1/User Mode 2/Reading Mode/Darkroom Mode)
Color Temperature Selection : 4 Modes
Color Accuracy : ?E< 2
Gamma adjustment : Yes (Support Gamma 1.8/2.0/2.2/2.4/2.6)
Color Adjustment : 6-axis adjustment(R,G,B,C,M,Y)
Picture-in-Picture : Yes
Picture-by-Picture : Yes
Low Blue Light : Yes
HDCP support : Yes, 1.4 & 2.2
VividPixel : Yes
Adaptive-Sync supported :Yes
HDR (High Dynamic Range) Support :Yes HDR-10

Audio Features Stereo Speakers : 2W x 2 Stereo RMS

I/O Ports Signal Input : Thunderbolt™ 3 USB-C™ x2 (In x1, Out x1), HDMI(v2.0b) x2, DisplayPort
Earphone jack : 3.5mm Mini-Jack
USB upstream : Thunderbolt™ 3 USB-C™ x2
USB downstream : USB3.0 Type-A x3

Signal Frequency Digital Signal Frequency : 30 ~151 KHz (H) /40 ~100 Hz(V)

Power Consumption Power On (Typical): < 56.72W
Power Saving Mode : < 0.5W ; Power Off Mode : 0W (Hard Switch)
100-240V, 50/60Hz

Mechanical Design Chassis Colors : Black
Tilt : +23°~-5°
Swivel : +30°~-30°
Height Adjustment : 0~120 mm
VESA Wall Mounting : 100x100mm
Quick Release Stand Design : Yes

Security Kensington lock

Dimensions Phys. Dimension with Stand (WxHxD) : 815.12 x (418~538) x 222.86 mm
Phys. Dimension without Stand (WxHxD) : 815.12 x 364.79 x 122.17 mm
Box Dimension (WxHxD) : 980 x 401 x 588 mm

Weight Net Weight (Esti.) : 11.4 kg,
Without Stand: 7.8 Kg,
Gross Weight (Esti.) : 17.18 kg

Accessories Thunderbolt™ 3 Cable
Power cord
DisplayPort cable
USB-C to A cable
Quick start guide
HDMI cable
Support CD
Warranty Card
Color pre-calibration report

Compliance and Standards BSMI, CB, CCC, CE, CEL level 0, CU, ErP, FCC, ISO-9241-307, J-MOSS, Mac Compliance, PSE, RoHS, UL/cUL, VCCI, WEEE, WHQL (Windows 10, Windows 8.1), Flicker-free, Ukraine, KC, eStandby, TUV Low Blue Light, Vietnam MEPS, MSIP(KCC), EU energy label

Note *measuring a screen brightness of 200 nits without audio / USB / Card reader connection
**All specifications are subject to change without notice.