


Key Features

- Easily extend your content from laptops and mobile devices
- One-cable solution for audiovisual and power signal transmission
- Flexible display setup work at any angle
- Compact size, light weight, and highly portable
- Sturdy and durable design



Product **Description**

The ViewSonic VG1655 is a portable 16" Full HD monitor perfect for overcoming one-screen limitations outside the office. Extend the screen from phones, tablets, or laptops for mobile work, one-on-one presentations, or leisure entertainment. The two universal USB Type C connectors provide a one-cable solution for audiovisual and power signal transmission. The adjustable wide stand and pivot-able display will support your working angles. With the anti-slip cover, stainless case, and aluminum stand, reliability is embodied in the design.

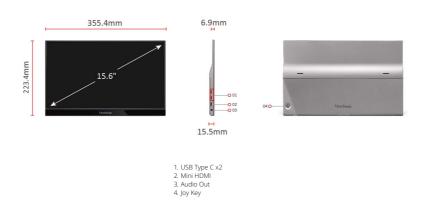

Visit Us - www.viewsonic.com

| | | datasneet_vG1055 | |
|--------------------------------------|--|---|---|
| DISPLAY | | WEIGHT (IMPERIAL) | |
| Display Size (in.): | 16 | Net (lbs): | 1.8 |
| Viewable Area (in.): | 15.6 | Net Without Stand (lbs): | 1.8 |
| Panel Type: | IPS Technology | Gross (lbs): | 4.8 |
| Resolution: | 1920 x 1080 | WEIGHT (METRIC) | |
| Resolution Type: | FHD | Net (kg): | 0.8 |
| Static Contrast Ratio: | 800:1 (typ) | Net Without Stand (kg): | 0.8 |
| Dynamic Contrast Ratio: | 50M:1 | Gross (kg): | 2.2 |
| Light Source: | LED | DIMENSIONS (IMPERIAL) (W | XHXD) |
| Brightness: | 250 cd/m2 (typ) | Packaging (in.): | 17.3 x 11.3 x 3.5 |
| Colors: | 16.2M | Physical (in.): | 14 x 8.8 x 0.6 |
| Color Space Support: | 8 bit (6 bit + FRC) | Physical Without Stand (in.): | 14 x 8.8 x 0.6 |
| Aspect Ratio: | 16:9 | DIMENSIONS (METRIC) (WXI | łXD) |
| Response Time (Typical GTG): | 6.5ms | Packaging (mm): | 440 x 288 x 89 |
| Response Time (GTG w/OD): | 6.551ms | Physical (mm): | 355 x 223 x 16 |
| Response Time (Typical Tr+Tf): | 30ms | Physical Without Stand (mm): | 355 x 223 x 16 |
| Viewing Angles: | 178° horizontal, 178° vertical, CR>5; 170° horizontal, 170° vertical, CR>10 | GENERAL | cTUVus, FCC-B, ICES003, Energy |
| Racklight Life (Hours): | | Regulations: | Star 8.0, EPEAT Bronze, CEC, NRCan, MX-CoC, Mexico Energy, CE, CE EMC, CB, RoHS, ErP, |
| Backlight Life (Hours): Curvature: | 15000 Hrs (Min) Flat | | |
| | 60 60 | | REACH, WEEE, EAC, UkrSEPRO |
| Refresh Rate (Hz): | | VG1655 x1, mini HDMI to HDMI Cable (v1.4; Male-Male) x1, USB | |
| Blue Light Filter: | Yes NTSC: 45% size (Typ), sRGB: 64% | PACKAGE CONTENTS: | Type-C Cable (Male-Male) x1, USB Type-C to Type-A 3.2 Gen1 Cable (Male-Male) x1, AC/DC Adapter x1, Quick Start Guide x1, Protect cover x1, Clean cloth x1 |
| Color Gamut: | size (Typ) | | |
| Pixel Size: | 0.179 mm (H) x 0.179 mm (V) | | Please dispose of in accordance with |
| Surface Treatment: | Anti-Glare, Hard Coating (3H) | Recycle/Disposal: | local, state or federal laws. |
| COMPATIBILITY DO Description (many) | 40004000 | Warranty: | *Warranty offered may differ from market to market |
| PC Resolution (max): | 1920x1080 | Dawar Managament | |
| Mac® Resolution (max): | 1920x1080 | Power Management: | Energy Star standards, EPEAT |
| PC Operating System: | Windows 10 certified; macOS tested | | |
| Mac® Resolution (min): | 1920x1080 | | |
| CONNECTOR | | | |
| USB 3.1 Type C: | 2 | | |
| 3.5mm Audio Out: | 1 | | |
| Mini HDMI: | 1 | | |
| Power in: AUDIO | External power adapter | | |
| Internal Speakers: | 0.8Watts x2 | | |
| POWER | | | |
| Eco Mode (Conserve): | 5.1W | | |
| Eco Mode (optimized): | 6W | | |
| Consumption (typical): | 7W | | |
| Consumption (max): | 7.3W | | |
| Voltage: | AC 100-240V, 50/60 Hz | | |
| Stand-by: | 0.5W | | |
| Power Supply: | External | | |
| ADDITIONAL HARDWARE | | | |
| CONTROLS | | | |
| Physical Controls: | Up, Right, Down, Left, Power | | |
| On Screen Display: | Input Select, Audio Adjust, ViewMode, Color Adjust, Manual | | |
| OPERATING CONDITIONS | Image Adjust, Setup Menu | | |
| Temperature: | 32°F to 104°F (0°C to 40°C) | | |
| Humidity (non-condensing): | 20% to 90% | | |
| WALL MOUNT | | | |
| INPUT SIGNAL | | | |
| Frequency Horizontal: | 15 ~ 82KHz | | |
| Frequency Vertical: | 50 ~ 75Hz | | |
| VIDEO INPUT | | | |
| Digital Sync: | TMDS - mini HDMI (v1.4), Micro- Packet - Type C | | |
| ERGONOMICS | ,, | | |
| Tilt (Forward/Back): | 20° / 60° | | |
| | | | |

Copyright © ViewSonic Corporation 2000-2020. All rights reserved.