


DS SERIES

DS752LR4

75" Ultra HD High Brightness 3,500 Nits Digital Signage




**SUNLIGHT
VIEWABLE IMAGE**




**4K UHD
RESOLUTION**



**LED BACKLIT WITH
LOCAL DIMMING**



**BUILT-IN
MEDIA PLAYER**



**TRUECOLOR™
CALIBRATED**

FOR MORE INFORMATION

For more information about DynaScan, visit our site at www.dynascandisplay.com. Copyright © DynaScan Technology Inc. All rights reserved. All specifications and descriptions are subject to change without notice. Reproduction without permission is prohibited.



DynaScan

SPECIFICATION

| | | | |
|---------------------------|------------------------------|---|---|
| MODEL | DS752LR4 | | |
| PANEL | LCD Panel Size | 74.52 inches LCD | |
| | Native Resolution | 3840 x 2160 | |
| | Backlight | LED | |
| | Default Color Temperature | D65 (6500 K) | |
| | Brightness | 3,500 nits | |
| | Color Depth | 10 bits | |
| | Contrast Ratio | 3000 : 1 | |
| | Response Time (Typ.) | 8 ms | |
| | Viewing Angle | 178° / 178° | |
| | Light Lifetime (Typ.) | 100,000 hrs | |
| POWER | Blackening Defect Free | Up to 110°C (230°F) | |
| | Polarized Sunglasses Support | Yes | |
| | Panel Surface | AG Haze 3%, 2H | |
| | Power Supply | Internal | |
| | Rated Voltage | 100-240V ~ 50/60Hz | |
| | Power On Mode (Typ./ Max) | 420 W / 800 W | |
| | Power Saving Mode | < 1W | |
| | AC out | < 100 W | |
| | MECHANICAL SPECS | Bezel Width (T/B/L/R) | 17.0 / 17.0 / 16.5 / 16.5 mm |
| | | Cabinet Color | Black |
| Monitor Dimension (LxHxD) | | 1688 x 967.5 x 94.2 mm | |
| Monitor Weight | | 60 kg | |
| Orientation | | Portrait / Landscape | |
| VESA Mounting (LxH) | | 800 x 400 mm | |
| Carring Handles | | Yes | |
| USER INTERFACE | | Language | English |
| | | Support SNMP (Up to V3.0) | Yes |
| | | Proof of Image Retention | Yes |
| | Ambient Light Sensor | Yes | |
| | Power On/Off Scheduling | Yes | |
| | Internal Temperature Sensor | Yes | |
| | OSD Menu Rotation | Yes | |
| | INPUT | HDMI | x2 (2160p) |
| | | Display Port | x1 |
| | | USB | x1 (For Internal Player), x1 (Service Port) |
| OUTPUT | SD Slot | x1 | |
| | Audio | x1 | |
| EXTERNAL CONTROL | RS-232 | In x1, Out x1 | |
| | RJ-45 | x1 (LAN) | |
| INTERNAL PLAYER | Operating System | Android 7.1.2 | |
| | Storage | Internal: 8GB eMMC Flash External: Support SD , Up to 32GB | |
| | Multimedia | 4K 10bits H265/H264 video decoders 1080P other video decoders (VC-1, MPEG-1/2/4, VP8) 1080P video encoder for H.264 and VP8 | |
| | Wi-Fi Specification | 802.11 b/g/n 2412.0MHz - 2462.0MHz | |
| ENVIRONMENT | Operating Temperature | 0° C ~ 45° C | |
| | Storage Temperature | -20° C ~ 60° C | |
| CERTIFICATION | Humidity | 10% ~ 80% RH Non-condensing | |
| | | CE / FCC / RoHS | |

DIMENSIONS

Unit: mm [inch]

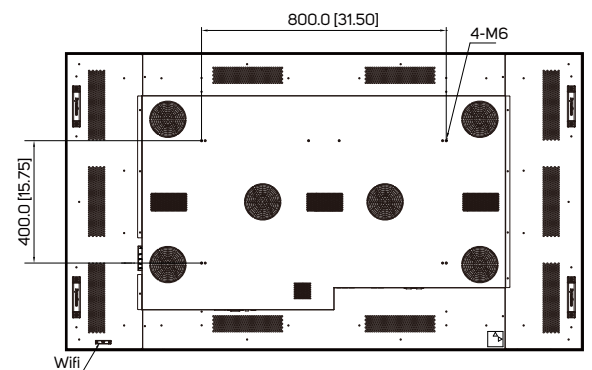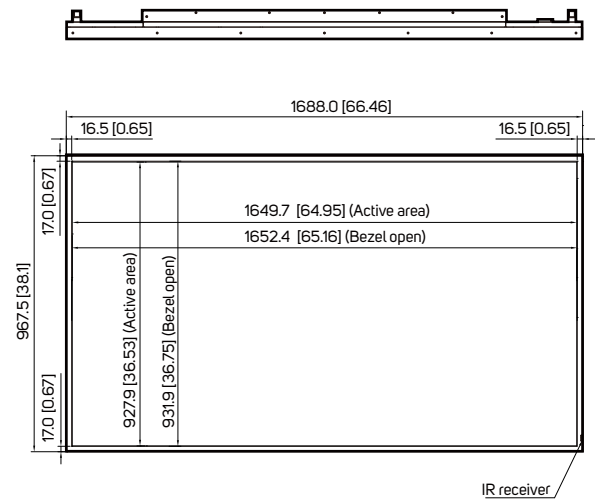

INTERFACE

