


Catchbox Plus

Technical specifications

General specifications

Audio latency	15.5 ms
Max wireless range	100 m / 330 ft (line of sight)
Frequency band	DECT / DECT 6.0 (1.8-1.9 Ghz)
Audio frequency response	50-20000 Hz
Signal type	Digital
Antenna diversity	Yes
Max # of systems in one space	EU: up to 10, US: up to 6




Hub

Audio output	Mic 1 - XLR - balanced, Mic level Mic 2 - XLR - balanced, Mic level Mix output - USB-C - digital output Mix output - RCA - unbalanced, Line level
Audio input	USB-C - digital input Aux-in - 3.5mm - unbalanced, Line level
Dante™ audio network	PRO
API / Remote monitoring	PRO
Antenna type	Built in antennas
Kensington lock	Yes
Weight (without mounting kit)	300 g / 10.58 oz
Dimensions (without mounting kit)	184 x 92 x 40 mm / 7.2 x 3.6 x 1.6 in



Clip

Audio frequency response	50 to 20000 Hz
Microphone element	Electret condenser, omni-directional
Battery type	Li-ion, rechargeable
Battery life	Typical 8h
Battery charge time	USB-C: 2h Dock: 2h
Weight	57 g / 2.01 oz
Dimensions (with lever)	40 x 72 x 28 mm / 1.57 x 2.83 x 1.10 in

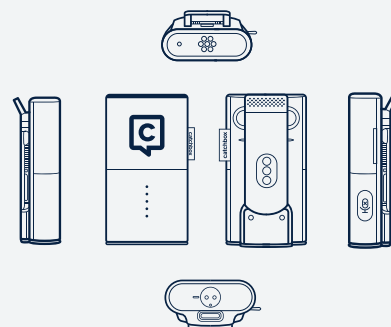

Cube

Audio frequency response	50 to 20000 Hz
Microphone element	Electret condenser, omni-directional
Built-in Automute technology	Yes
Battery type	Li-ion, rechargeable
Battery life	Typical 12h
Battery charge time	Cube Wireless Charger: 6h USB-C: 3h
Weight	370 g / 13.05 oz
Dimensions (with cover)	180 x 180 x 180 mm / 7 x 7 x 7 in

