

## BOXi MP-350 [Basic specifications]

CODE : 1915-1

Item	Specification	
Projection performance	Brightness	300 lm
	Contrast ratio	1,000:1 (JIS X 6911) (10,000:1 Our standard of measurement) *
	Resolution	WXGA 1,280×800
	Aspect ratio	16:10
	Homogeneity	80% (JBMA Base period)
	Lens	F=2.0 f=9.05mm
I/O	VGA input	D-Sub 15p
	HDMI input	HDMI TypeA
	USB terminal	USB2.0 TypeA
	WiFi	IEEE802.11b/g/n
	Audio (speaker) output	Built-in audio (speaker) output (1W)
Input signal type	RGB signal input	640×350~ WSXGA+(1680×1050)
	HDMI input	480i/p, 576i/p, 720p, 1080i/p 640×350~WSXGA+(1680×1050) HDMI 1.4b Compliance, HDCP Correspondence
Noise level	Noise (FAN)	47dB (Presentation mode) 40dB (Other than those above)
	AC Adapter	100~240V, 50~60Hz
Power source	Power Consumption	65.4W 35W
	External dimensions	132mm(Dimension)×143mm(Width)×43mm(Height) (The height includes rubber feet)
External size and Weight	Weight	500g
	Operational temperature/Operational humidity	5~35 °C / 85% (Maximum)
Operating environment	Storage temperature/Storage humidity	-20°C ~ +60°C / 90% (Maximum) No condensation

## BOXi T-350 [Basic specifications]

CODE : 1917

Item	Specification	
Projection performance	Brightness	300 lm
	Contrast ratio	1,000:1 (JIS X 6911) (10,000:1 Our standard of measurement) *
	Resolution	WXGA 1,280×800
	Aspect ratio	16:10
	Homogeneity	80% (JBMA Base period)
	Lens	F=2.0 f=9.05mm
I/O	HDMI input	HDMI TypeA
	Audio (speaker) output	Built-in audio (speaker) output (1W) Monaural
	External Audio Output	Headphone Max. output power: 30mW+30mW (16Ω Load)
Input signal type	HDMI input	480i/p, 576i/p, 720p, 1080i/p 640×350~WSXGA+ (1680×1050) HDMI 1.4b Compliance, HDCP Correspondence, CEC Correspondence
	Noise level	Noise (FAN)
Power source	AC Adapter	100~240V, 50~60Hz
	Power Consumption	56.4W (12V, 4.7A): Normal mode 25.2W (12V, 2.1A): Eco mode
External size and Weight	External dimensions	132mm(Dimension)×143mm(Width)×44mm(Height) (The height includes rubber feet)
	Weight	480g
Operating environment	Operational temperature/Operational humidity	5~35 °C / 85% (Maximum)
	Storage temperature/Storage humidity	-20°C ~ +60°C / 90% (Maximum) No condensation

### Mobile Battery

The mobile battery to use with BOXi T-350/T-200 has to meet the following conditions:

1. Battery output voltage: DC19V
2. Rated current: 3.5A or more
3. Overcurrent-protection circuit on-board
4. Compliant with the standards of using area (UL, CE, PSE, e.g.)

## BOXi T-200 [Basic specifications]

CODE : 1918

Item	Specification	
Projection performance	Brightness	150 lm
	Contrast ratio	1,000:1 (JIS X 6911) (10,000:1 Our standard of measurement) *
	Resolution	WXGA 1,280×800
	Aspect ratio	16:10
	Homogeneity	60% or more
	Lens	F=2.0 f=9.05mm
I/O	HDMI input	HDMI TypeA
	Audio (speaker) output	Built-in audio (speaker) output (1W) Monaural
	External Audio Output	Headphone Max. output power: 30mW+30mW (16Ω Load)
	USB External power feeding output	DC5V Maximum 2A Constant power feeding
	Input signal type	HDMI input
Noise level	Noise (FAN)	39dB (Brightness mode) / 37dB (Except for the left)
	AC Adapter	100~240V, 50~60Hz
Power source	Power Consumption	36W (Brightness mode, USB power supply 2A) 25W (Brightness mode, No USB power feeding)
	Power Consumption(Standby time)	0.5W or less (CEC OFF, No USB power feeding)
	External dimensions	95mm(Dimension)×153mm(Width)×36mm(Height) (The height includes rubber feet)
External size and Weight	Weight	300g
	Operational temperature/Operational humidity	5~35 °C / 85% (Maximum)
Operating environment	Storage temperature/Storage humidity	-20°C ~ +60°C / 90% (Maximum) No condensation

\*The ratio of the maximum white illumination to the minimum black illumination of the projection system



BOXi Special Website

Please refer to the detailed information of the products here.

<http://www.elmoboxi.com>



Read the "Instruction Manual" carefully before using the projector.

Do not place this product in locations subject to water, humidity, vapor, dust, oil, smoke, etc. as it may cause fire, electric shock, or damage to this unit.

ELMO, ELMO BOXi are trademarks or registered trademarks of ELMO Co., Ltd.  
This product has been licensed under AVC Visual Patent Portfolio License (hereafter AVC Studio) and admitted to use for personal and non-profit purpose only.  
(1) When playing recorded AVC Video for personal and non-profit purpose, (2) Please contact MPEG-LA, LLC.  
Other described company and product names are each company's trademarks or registered trademarks.  
The price does not include install adjustments, incidental construction cost, recovery cost for used items and so on.  
Specifications and prices are subject to change without notice.

ISO 9001  
ISO 14001

## ELMO CO., LTD.

6-14, Meizen-cho, Mizuho-ku  
Nagoya, 467-8567, Japan  
E-mail : [overseassales@elmo.co.jp](mailto:overseassales@elmo.co.jp)

### ELMO (Beijing) Co., Ltd.

#603 South Tower, EAS logistics Bldg.,  
No.21 Xiaoyun Rd., Chaoyang Dist.,  
Beijing 100027, P.R.China  
Tel. +86 10 5716 3482  
Fax. +86 10 6462 6605

Distributed by

### ELMO USA Corp.

Headquarters  
1478 Old Country Road  
Plainview, NY 11803 U.S.A.  
Tel. +1 (516) 501 1400  
Fax. +1 (516) 501 0429  
E-mail : [elmo@elmousa.com](mailto:elmo@elmousa.com)  
Web : <http://www.elmousa.com>

### West Coast Branch

5676 Corporate Avenue  
Cypress, CA 90630 U.S.A.  
Tel. +1 (714) 828 8457  
Fax. +1 (714) 828 8429

### ELMO Europe SAS

Headquarters  
Immeuble Elysées La Défense,  
7C Place du Dôme,  
92056 Paris La Défense, France  
Tel. +33 (0)1 73 02 67 06  
Fax. +33 (0)1 73 02 67 10  
E-mail : [info@elmoeurope.fr](mailto:info@elmoeurope.fr)  
Web : <http://www.elmoeurope.fr>

### German Branch

Hansaallee 201, Haus 1  
40549 Düsseldorf  
Germany  
Tel. +49 (0) 211 544756 40  
Fax. +49 (0) 211 544756 60  
E-mail : [info@elmo-germany.de](mailto:info@elmo-germany.de)  
Web : <http://www.elmo-germany.de>

**ELMO**  
— SINCE 1921 —

# BOXi

## MOBILE PROJECTOR



**MP-350**  
Exceptionally Adaptable  
Multi-Functional Model



**T-350**  
Easy-to-Use  
Simplified Model



**T-200**  
Light & Slim Model

<http://www.elmoboxi.com>  
Mobile Projector BOXi

# CONVENIENT & EFFECTIVE FOR BUSINESS




## IN THE OFFICE...

### For Meetings & Conferences...



There is no need to book a meeting room with BOXi as even small spaces can be used for important meetings. A 3.2 ft throw distance projects a 50 inch image which means less space is required to visually support communication with clients.

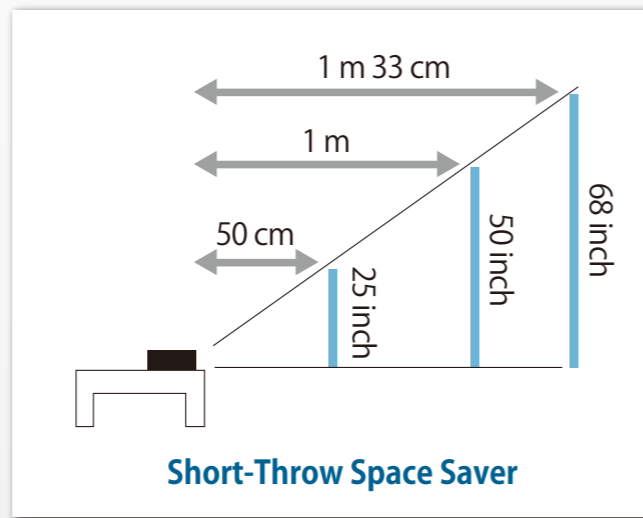

## ON THE GO...

### Presenting to Clients




With its compact lunch-box size, you can carry BOXi in a briefcase or purse wherever you go. A quick 7 seconds start up & shut down facilitates faster mobilization of presentations.



## FOR COMMERCIAL USE...

### For Entertainment

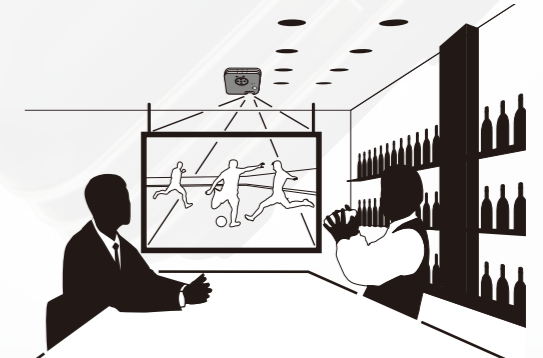

BOXi is ideal for commercial use in sports bars and restaurants. The long life LED lamp can run for eight hours a day for approximately 6.8 years making BOXi a great option for low-cost digital signage.

## MP-350

### Exceptionally Adaptable Multi-Functional Model



#### BOXi x PC

Collaborate with others with ELMO's BOXi Play software where up to 4 computer screens can be viewed wirelessly at the same time.

#### BOXi x Smartphone / Tablet

Use the BOXi Air app to make an impact at your next meeting when you give a presentation wirelessly while carrying your tablet.

#### BOXi x USB Storage device

Insert a USB flash drive to easily project Word, Excel, PowerPoint, PDF files or watch a movie.

## T-350

### User-Friendly Simplified Model




## T-200

### Light and compact model



#### Simple Configuration

Just connect the power and HDMI cable to start using BOXi.

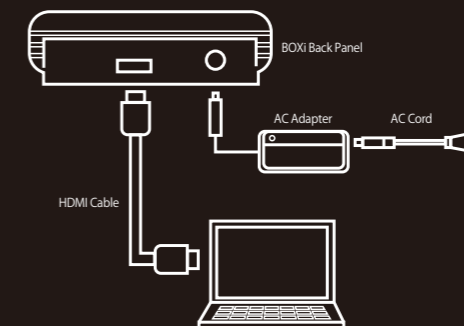

#### Audio Output

In addition to a built-in speaker, an external output is included for connecting to a speaker.

#### Various Display Modes

Choose from 7 types of display modes to match your projection setting.

	User	Customize preferences.
	Cinema	Film/Movie mode
	Photo	View still images, such as photos, for exact color reproduction.
	Normal(Default)	Standard color and brightness mode
	Game	Game and animation mode
	Presentation	Advanced chromogenic mode for vivid projection of computer documents.
	Bright (Max)	Brighter projection mode

#### Mobile Battery

Use the convenient mobile battery (sold separately) when using BOXi T-200 or T-350 outdoors or in places with limited or no electricity.

