

FEATURE HIGHLIGHTS

- 1,5X ZOOM
- THROW RATIO:1.46~2.2
- 13000:1 HIGH CONTRAST RATIO
- EXTRON IP LINK CERTIFIED
- ADVANCE INFOGRAPHIC PICTURE MODE



Product Specifications

Articlenumber	9HJGH77.25E	
EAN Code	471 8755 07822 4	
Projection System	DLP	
DMD type	DC3	
Native Resolution	1280 x 800 pixels, 16:10	
Brightness	5000 ANSI Lumens	
Contrast Ratio*	13,000 : 1	
Display Color	1,07 billion	
Aspect Ratio	Native 16:10 (5 aspect ratio selectable)	
Projection Size	25.3"~318"	
Throw Ratio	1.46~2.2	
Zoom Ratio	1,5x	
Lens	F# : 2.42 ~2.97, f : 20.7 ~ 31.05mm	
Lens Shift	NA	
Light Source Type	Lamp (310W)	
Light Source Life **	Normal 2,500 hours / Eco 3,500 hours / SmartEco 4,500 hours	
Keystone Correction	2D, Horizontal / Vertical ± 30 degree	
Projection Offset	111.3%(Full Height)	
Resolution Support	VGA(640 x 480) to WUXGA_RB(1920 x 1200)	
Horizontal Frequency	15K ~ 102 kHz	
Vertical Scan Rate	23 ~ 120 Hz	
Compatibility	HDTV Compatibility	480i, 480p, 576i, 576p, 720p, 1080i, 1080p
	Video Compatibility	NTSC, PAL, SECAM
Speaker	10W x1	
Security	Security bar / Kensington Security Slot	
Dimensions (W x H x D)	314 x 117 x 233 mm	
Weight	3,3 kg	
Power Supply	100~ 240V AC, 4,2A, 50/60 Hz	
Power Consumption	Max 420W / Normal 365W / Eco 290W	
Standby Power Consumption	Normal < 0,5W	
Audible Noise	36 / 31 dBA (Normal/Eco mode)	
Operating Temperature	0 ~ 40°C	
On-Screen Display Languages	Arabic / Bulgarian / Croatian/ Czech / Danish / Dutch / English / Finnish / French / German / Greek / Hindi / Hungarian / Italian / Indonesian / Japanese / Korean / Norwegian / Polish / Portuguese / Romanian / Russian / Simplified Chinese / Spanish / Swedish / Turkish / Thai / Traditional Chinese (28 Languages)	
Accessories	Standard	Optional
	Power Cord (by region) Remote Control w Battery VGA Kabel User Manual CD QSG Warranty Card	Spare Lamp Kit P/N: 5JJFG05.001 Ceiling Mount P / N: 5JJAM10.001 Wireless dongle: QCast (QP01) Instashow (WDC10) Carry Bag 3D Glasses (5JJ9H25.002)
Guarantee	36 month	


*Lamp in this product contains mercury.To dispose of the product or used lamps, consult your local environment authorities for regulations or see www.lamprecycle.org.

**Lamp life results will vary depending on environmental conditions and usage.Actual product's features and specifications are subject to change without notice.

**Default mode is Presentation.When 3D is on,Picture Modes only shows 3D.When 3D is off,it is not shown in Picture Modes.


*** Storage:Temperature: -20~60°C;Humidity: 10~90%RH (without condensation)

Input and Output Terminals

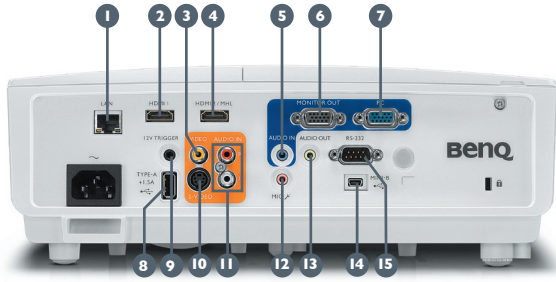


- ① LAN (RJ45)
- ② HDMI 1
- ③ HDMI 2 / MHL
- ④ Composite Video in (RCA)
- ⑤ Audio in (Mini Jack)
- ⑥ Monitor out
- ⑦ PC (D-sub 15pin)
- ⑧ USB (Type A)
- ⑨ DC 12V Trigger (3.5mm Jack)
- ⑩ S-Video in
- ⑪ Audio L/R in (RCA)
- ⑫ Microphone in (Mini Jack)
- ⑬ Audio out (Mini Jack)
- ⑭ USB (Type mini B)
- ⑮ RS232 (DB-9pin)

Dimensions


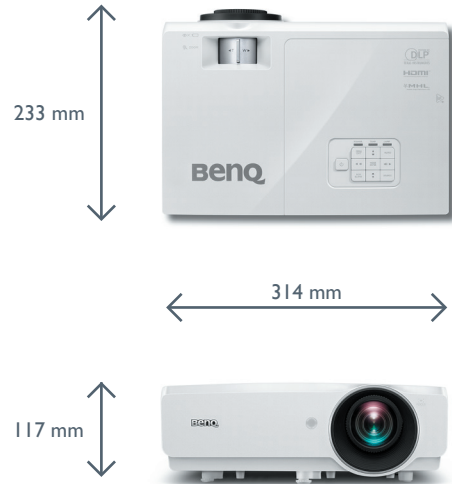


Distance Chart

Screen				Distance from screen (mm)			Offset (mm)
Diagonal	W	H	Min distance	Average	Max distance		
Inch	mm	(mm)	(mm)				
60	1524	1292	808	1887	2365	2843	92
70	1778	1508	942	2201	2759	3317	107
80	2032	1723	1077	2516	3153	3791	122
90	2286	1939	1212	2830	3547	4265	137
100	2540	2154	1346	3145	3942	4765	153
120	3048	2585	1615	3774	4730	5686	183
150	3810	3231	2019	4717	5912	7108	229
170	4318	3662	2289	5346	6701	8056	260
180	4572	3877	2423	5660	7095	8530	275
190	4826	4092	2558	5975	7489	9003	290
200	5080	4308	2692	6289	7883	9477	305
250	6350	5385	3365	7862	9854	11847	382
300	7620	6462	4039	9434	11825	14216	458

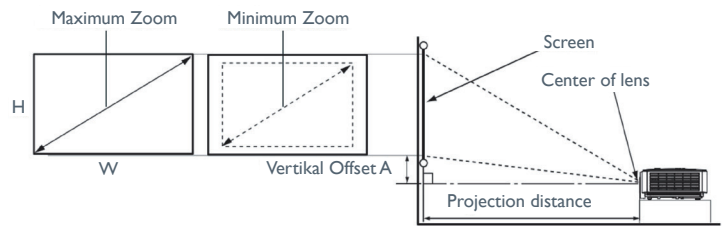

Ceiling Mount Chart

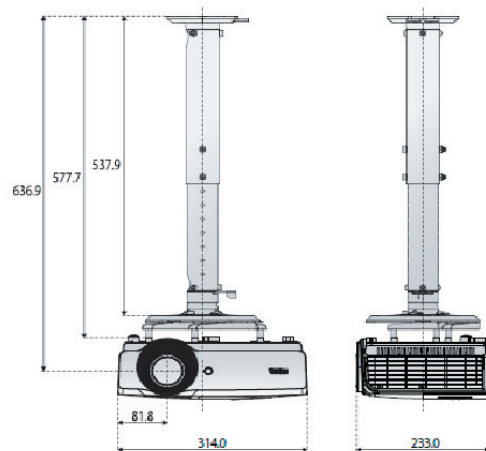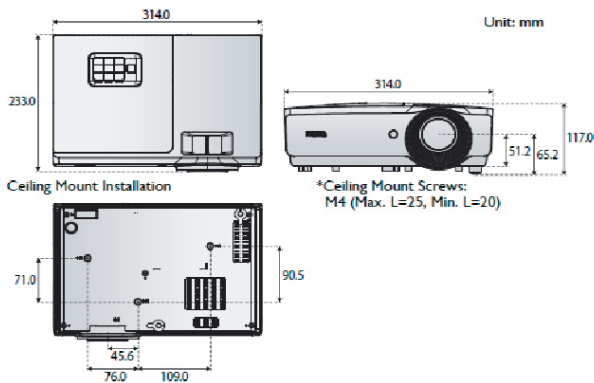

BenQ Europe B.V.

Meerakkerweg 1-17
5652 AR Eindhoven
The Netherlands
Tel: +31 88 8889200

BenQ.eu

© 2018 BenQ Corp. Specifications may vary by region, please visit your local stores for details. Actual product's features and specifications are subject to change without notice. This material may include corporate names and trademarks of third parties which are the properties of the third parties respectively. Latest Update: 2018-11-30

BENQ