

Warranty Information: All regions Except China Mainland

JmGO values your business and always attempts to provide you the very best of service. If this product require maintenance, either contact the dealer from whom you originally purchased the product or visit our product support website of jmgo.com for information on how to obtain service or a Return Material Authorization(RMA). If it is determined that the product may be defective, you will be given an RMA number and instructions for product return. An unauthorized return(i.e., one for which an RMA number has not been issued) will be returned to you at your expense. Authorized returns must be shipped in an approved shipping container, repaired and insured, to the address provided on your return paper. Your original box and package should be kept for storing or shipping your JmGO system.

Limited Warranty:
JmGO Warrants that the product, in the course of its normal use, will for the term defined below, be free from defects in materials and workmanship and will conform to JmGO's specification therefor. The term of your limited warranty is for 1 year and this period shall commence on the purchase date appearing on your purchasing receipt. Subject to limitations specified above, your sole and exclusive warranty shall be, during the period of warranty, the repair or replacement of the product with an equivalent or better one.



DESIGNED BY JMGO CREATIVE CENTER

8




DESIGNED BY JMGO CREATIVE CENTER

Scan for more information
EN.JMGO.COM

1


Enjoy the Changes Brought by Science & Technology.

Using the System

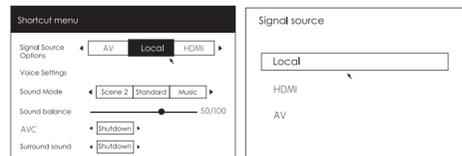


Video signal source switch:

When external signal source is inputted to JMGO devices by JMGO HDMI or AV interface, gently press "JMGO" button to call out shortcut menu, or enter the signal source setting interface with "Setting signal source" menu and select the desired "Video signal source" option in this interface. As the signal source switches, JMGO devices could be connected to the external video source and project the contents displayed by the video source.

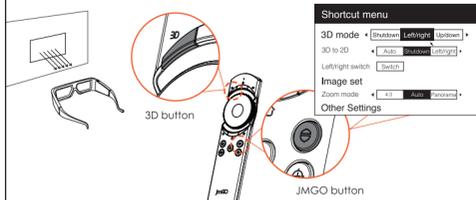

3D playback

1. When 3D videos are played, push the "3D" button of the remote control gently for one-button switch to 3D mode videos. Meanwhile, gently press "JMGO" button of the remote control in the video interface to call out the shortcut menu and set the mode of 3D videos.
2. Special note: Active shutter 3D glasses must be used to watch 3D video contents. Please be aware when choosing 3D glasses.

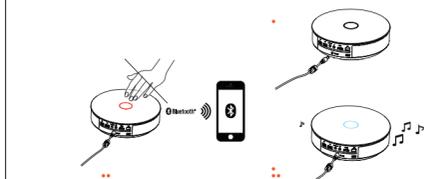


Using JmGO system as a HIFI Bluetooth

JmGO system can be used as a HIFI Bluetooth Speaker in Standby mode. After connecting the JmGO system to a AC power outlet, indicator lights red(standby), your JmGO system is ready to stream audio from a bluetooth device(i.e., a mobile phone, a pad or any bluetooth).

Bluetooth pairing


Enable the Bluetooth of the device, search the visible Bluetooth devices until "JmGO-XX"(XX stands for different JmGO models) appears. Click "JmGO-XX" for pairing. 3-5 seconds later, indicator on the JmGO system turns blue, pairing succeeded.

9

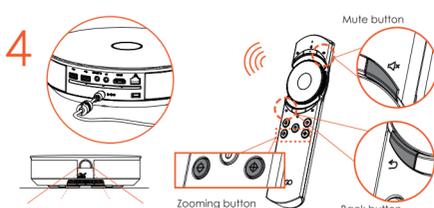

Remote control pairing and zooming:

1. Remote control pairing: to pair the remote control with the host, move the remote control near to power input of the host, long press Mute and Back button simultaneously, the indicator light first flashes slowly, then flash fast. The light keeps on 2 seconds and goes out, which means successful pairing.
Note: If you get the remote control which has been paired with the host, no need for your manual pairing again.
2. Zooming: Zooming button of the remote control could be used for zooming. Adjustment amount of focal length is associated with the projection distance, please adjust slowly, until clear pictures are seen on the projection plane.

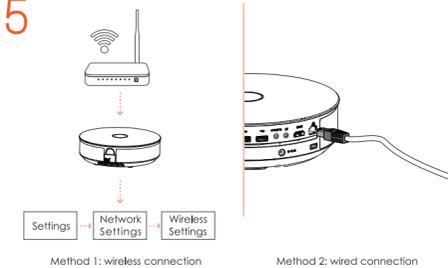


Connecting to the network:

1. Ethernet connector for a wired network connection.
2. Adding the JmGO to your WIFI network by following steps: Settings > Network Settings > Wireless Settings.

10

11

Appearance and Interfaces

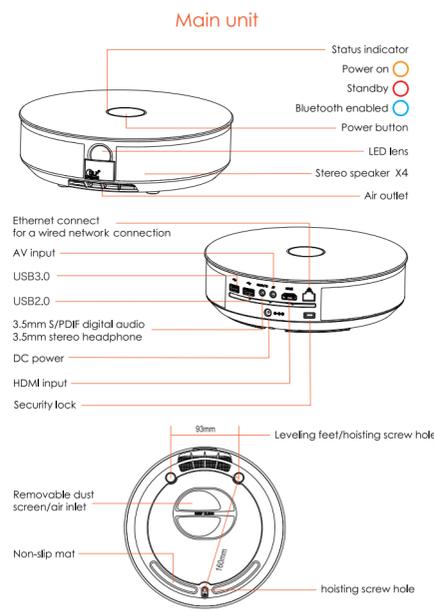

Power Your JmGO
Note: Your JmGO can be powered either by pressing the power button on the main unit or the remote control.
1. Insert the small plug on the power cord into the AC power connector.
2. Plug the other end into an AC(main) power outlet.
3. Your JmGO is Standby-ready to work.
4. Press the Power button on the top of your JmGO or the remote control.
Congratulations! A bigger world is waiting for you!

1

2

3


4

5

6

7

2.4G Remote control

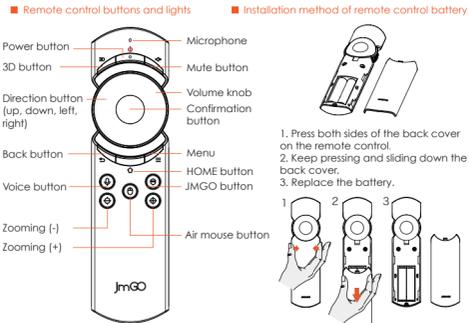

Remote control buttons and lights
Power button: as JMGO projector is connected to external power supply, gently press the power button to power on; gently press the power button, JMGO projector switch to standby mode. 3D button: one-button 3D switch.
Direction button: gently press direction button to adjust the focus direction.
Back button: return to the previous interface.
Voice button: long press voice button to enter remote control recording.
Zooming button: decrease/increase focal length.
Mute button: on/off mute mode.
Volume knob: turn clockwise to increase volume, turn counterclockwise to decrease volume.
Confirmation button: gently press to confirm the selection.
Menu button: gently press to call out application menu.
HOME button: gently press to return to the system interface.
JMGO button: gently press to call out shortcut menu.
Air mouse button: gently press to turn on/off air mouse.
Indicator description:
JMGO projector power on status: press the button, indicator turns on, Raise the buttons, indicator goes out.
JMGO the projector power off status: press the button, indicator light flashes twice; long press the button, indicator light continuous flashes;
Pairing status: long press the mute button + back button, enter pairing status.
The indicator light first flashes slowly, then flashes fast. The light keeps on 2 seconds and goes out, which means successful pairing.
Low voltage reminding: when the battery voltage is low, the light will flash for 1 second in hibernation status to remind low voltage. Please change the battery then.
Note: the remote control to use two AAA batteries.

1

2

3


4

5

6

7

Connecting other equipment

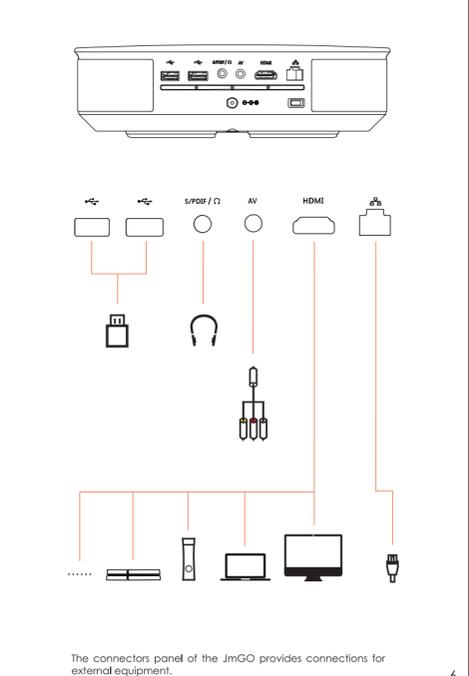

The connectors panel of the JmGO provides connections for external equipment.

1

2

3

4

5

6

7

Warranty Card

Customer's name: _____
Contact phone: _____
Customer's address: _____
S/N: _____
Store's name: _____
Store's address: _____
Date of purchase: _____

Warranty information:
Customer service: 400-662-0138 (China Mainland Only)
Manufacturer: Shenzhen Holatek Co., Ltd.
Address: Room 1001, Building B4, Kejing Science Park, Keyuan Road, Nanshan District, Shenzhen, China
Website: en.jmgo.com

1. Copyright © Shenzhen Holatek Co., Ltd. All rights reserved.
2. The document is for reference only.

1

2

3

4



5

6

7

Owner's Guide

Setting up the System

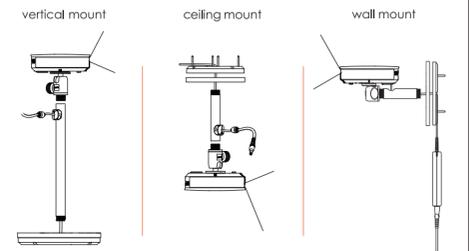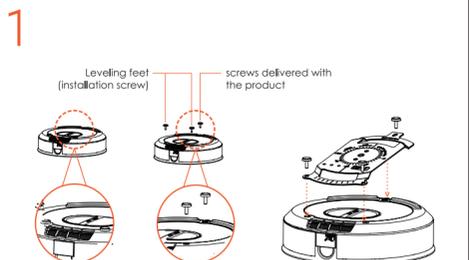

Precautions:

1. Before the installation, please refer to the Throw Ratio below for your reference.
2. For the best effect, make sure the main unit is on a flat level before mounting the unit to the wall or roof.
3. Air inlet on the bottom of the unit, air outlet in the front of the unit and LED lens should never be covered or blocked during working.

1

2

3

4

5


6

7

Screen Size (inch)	40	80	100	150	200	250	300
Throw Distance (m)	1.2-1.4	2.3-2.8	2.9-3.6	4.4-5.4	5.9-7.2	7.3-9.0	8.8-10.7

About the distance and projection size:

The throw distance is in direct proportion to the projection area. The longer the distance is, the larger the projection area will be. You can choose an appropriate throw distance according to the actual application conditions.

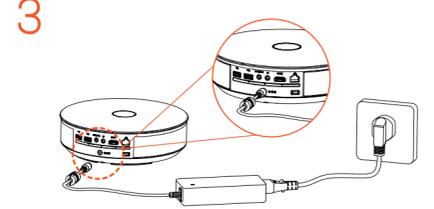

Connecting to the external power supply:

Connect the power cord to the power adapter. Insert the power adapter to the power part of the main unit, and the power cord to the power socket. Then, the status indicator of the main unit changes to red, indicating that the main unit is successfully connected to the power supply. At this time, the user can press the power button on the main unit or remote control to power on the main unit.

1

2


3

4

5

6

7

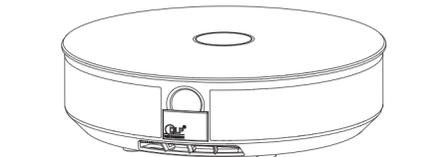

J M G O S M A R T H O M E T H E A T E R