

SONY



WUXGA HIGH IMAGE QUALITY
6000 lm/5000 lm
Low operating overhead
Maintenance-free for **20,000 HOURS***
Exceptional integration capabilities

*VPL-FHZ65/FHZ60

As of February 2015

Preliminary

VPL-FHZ65/FHZ60

3LCD Laser Projector

VPL-FH65/FH60

3LCD Installation Projector

Z-Phosphor

LASER LIGHT SOURCE



BrightEra™
Long Lasting Optics

HDMI



SPECIFICATIONS

		VPL-FHZ65	VPL-FHZ60	VPL-FH65	VPL-FH60
Display system		3 LCD system			
Display device	Size of effective display area	0.76" (19 mm) x 3 BrightEra LCD panel, aspect ratio: 16:10			
	Number of pixels	6,912,000 (1920 x 1200 x 3) pixels			
Projection lens*	Focus	Powered			
	Zoom	Powered/Manual	Powered		
		Ratio	Approx. x1.6		
	Throw ratio	1.39:1 to 2.23:1			
Lens shift	Powered/Manual	Powered			
	Range	Vertical: -5% to +60%; Horizontal: +/- 32%			
Light source	Type	Laser diode		High-pressure mercury lamp	
Filter replacement cycle		Maintenance-free			
Screen size*		40" to 600" (1.02 m to 15.24 m)(measured diagonally)			
Light output**		6000 lm	5000 lm	6000 lm	5000 lm
Color light output**		6000 lm	5000 lm	6000 lm	5000 lm
Keystone correction (Max)		Vertical +/- 30 degrees Horizontal +/- 30 degrees			
INPUT OUTPUT (Computer/ Video/Control)	INPUT A	RGB / Y PB PR input connector: Mini D-sub 15-pin (female) Audio input connector: Stereo mini jack			
	INPUT B	DVI input connector: DVI-D 24-pin (female), Single link, HDCP support			
	INPUT C	HDMI input connector: HDMI 19-pin, HDCP support Audio input connector: HDMI audio support			
	INPUT D	HDBaseT interface connector: RJ45, 4 play (Video, Audio, LAN, Control)			
	VIDEO IN	Video input connector: BNC Audio input connector: Stereo mini jack (shared with INPUT A)			
	OUTPUT A	Monitor output connector for INPUT A: Mini D-sub 15-pin (female) Audio output connector: Stereo mini jack			
	OUTPUT B***	Monitor output connector for INPUT B: DVI-D 24-pin (female)			
	REMOTE	RS-232C connector: D-sub 9-pin (male)			
	LAN	RJ-45, 10BASE-T/100BASE-TX			
Dimensions (W x H x D) (without protrusions)		Approx. 460 x 169 x 515 mm (18 1/8 x 6 3/5 x 20 3/8 inches)			
Optional accessories: Projection lenses		4 optional lenses			

* With supplied standard lens

** Light/Lamp output mode: High

*** Input signals with HDCP (contents protection) are not supported

Features


- Laser light source "Z-Phosphor" and 3LCD optical system create high brightness and vivid color image*¹
- High-resolution WUXGA image compatible with Full-HD resolution (1920 x 1080)
- 20,000 hours maintenance-free with robotic cleanable filter*¹*²
- Quick power on for smooth presentation*¹
- Powered lens shift/zoom/focus and bayonet mount system for easy adjustment
- Tilt angle-free for supreme installation flexibility*¹
- HDBaseT for simple installation
- Blend-in design

*¹ VPL-FHZ65/FHZ60 only*² Actual hours may vary depending on usage environment.

For business



For academic use

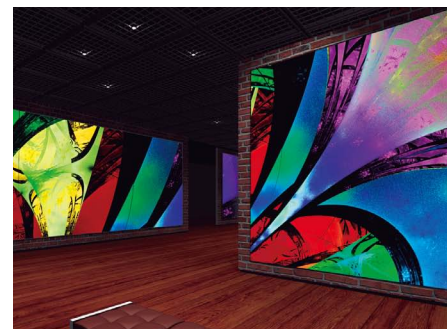

For entertainment

©2015 Sony Corporation.

All rights reserved. Reproduction in whole or in part without written permission is prohibited. Features and specifications are subject to change without notice. The values for mass and dimension are approximate. "SONY", "Z-Phosphor", "BrightEra" and "Remote Commander" are trademarks of Sony Corporation. The terms HDMI and HDMI High-Definition Multimedia Interface, and the HDMI Logo are trademarks or registered trademarks of HDMI Licensing LLC in the United States and other countries. HDBaseT and the HDBaseT Alliance logo are trademarks of the HDBaseT Alliance. All other trademarks are the property of their respective owners.

MK11181V2YIT15FEB