


Specifications


MODEL	X981UHD-2	X841UHD-2	X651UHD-2	X551UHD
LCD MODULE				
Viewable Size (Diagonal)	98"	84"	64.5"	54.6"
Active Screen Area (W × H)	2,158.8 × 1,214.4 mm	1,860.5 × 1,046.5 mm	1,428.5 × 803.5 mm	1,209.6 × 680.4 mm
Panel Technology	IPS			
Native Resolution	3,840 × 2,160 at 60 Hz			
Brightness (Typical / Maximum)	380 / 500 cd/m ²	380 / 500 cd/m ²	320 / 450 cd/m ²	400 / 500 cd/m ²
Contrast Ratio (Typical)	1,300:1	1,400:1	1,300:1	4,000:1
Viewing Angle [°]	178 horizontal / 178 vertical (at contrast ratio 10:1)			
Response Time (Typical)	8 ms (G to G)	12 ms (G to G)	8 ms (G to G)	6 ms (G to G)
CONNECTIVITY				
Input Terminals	DisplayPort	DisplayPort × 1		
	HDMI	HDMI × 4		
	DVI	DVI-D Dual Link × 2		
	Audio	Digital: HDMI × 4, DisplayPort × 1, Analogue: 3.5 mm Stereo Mini Jack × 1		
Output Terminals	Audio	3.5 mm Stereo Mini Jack × 1		
	External Speakers	Speaker terminals for L / R × 1		
	RS232C in	Mini D-Sub 9 pin × 1		
External Control	Ethernet	RJ-45 10/100BASE-T × 1		
	Remote in	3.5 mm Stereo Mini Jack × 1		
USB Hub	Upstream	USB 2.0 Type B (Max. 0.5 A) × 1		
	Downstream	USB 2.0 Type A (Max. 0.5 A) × 1		
OPS Option Slot	Slot Technology	Open pluggable specification (NEC / Intel OPS standard) × 1		
Speaker Output	External Speakers	15 W + 15 W (8 Ω)		
	Internal Speakers	10 W + 10 W		
POWER				
Power Requirement	7.7 to 3.0 A @ 100 to 240 V	6.7 to 2.7 A @ 100 to 240 V	3.6 to 1.4 A @ 100 to 240 V	3.6 to 1.4 A @ 100 to 240 V
Power Consumption (Typical)	420 W	380 W	150 W	150 W
Power Consumption - standby Mode	<0.5 W			
PHYSICAL SPECIFICATIONS				
Bezel Width	19.9 mm	32.6 mm	17.5 mm	18.5 mm
Dimensions (without stand: W × H × D)	2,204.8 × 1,259.8 × 108.0 mm	1,931.0 × 1,117.0 × 85.0 mm	1,468.4 × 843.6 × 87.4 mm	1,250.2 × 721.0 × 78.1 mm
Dimensions (with stand: W × H × D)	2,204.8 × 1,297.4 × 606.0 mm	1,931.0 × 1,154.2 × 606.0 mm	1,468.4 × 879.1 × 512.0 mm	1,250.2 × 760.5 × 400.0 mm
Packaging Dimensions (W × H × D)	2,355 × 1,454 × 400 mm	2,157 × 1,290 × 360 mm	1,736 × 1,054 × 320 mm	1,430 × 920 × 250 mm
Net Weight (without stand)	90.6 kg	70.5 kg	42.0 kg	28.7 kg
Gross Weight (with box)	117.0 kg	90.5 kg	55.6 kg	35.7 kg
VESA Hole Configuration	400 × 400 mm (M8, 4 holes)			
Supported Orientation	Landscape, Portrait			
ENVIRONMENTAL CONDITIONS				
Operating Temperature	0 to 40°C			
Operating Humidity	20 to 80 % (without condensation)			
ADDITIONAL FEATURES				
Operating Hours	24/7			
Sensors	Ambient Light Sensor	Integrated, triggered actions programmable		
	Motion Sensor	Optional, external, 4–5 m range, triggered actions programmable		
	Temperature Sensor	Integrated, 3 sensors, triggered actions programmable		
	NFC Sensor	Integrated, 2-cm range, free NEC Android App required		
ACCESSORIES				
Included	CD-ROM (User Guides / Manuals), DisplayPort Cable, Mini DisplayPort to DisplayPort cable, Power cord, Wireless remote control with batteries, Thumbscrews for optional stand*, Clamp*, Screw with washer*3			
Optional	Please see the below chart			

*1: X551UHD only, *2*3: x3 X551UHD

Terminals

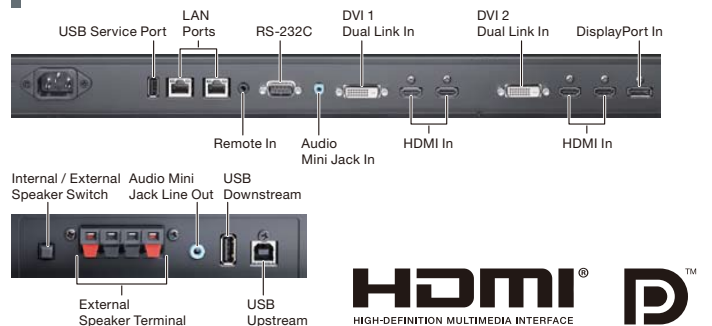

Dimensions

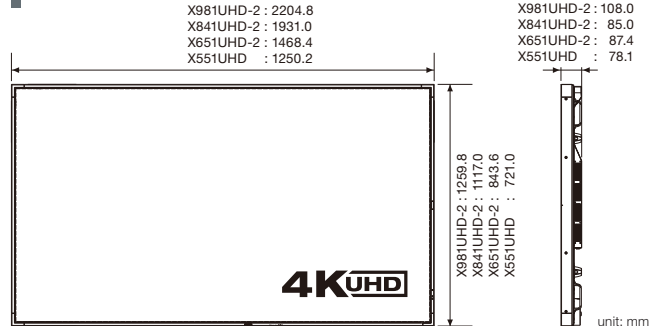

Options

	OPS-Single Board Controller (Computer)		Slot Board				HDMI DisplayPort 1.2	HDBaseT	Stand	Speaker	Sensor Kit	HDBaseT Interface Selector
			SDI Board			Motion, Ambient light IR Remote						
	Core i5 60GB-SSD	Core i5 320GB-HDD	Quad-SDI	3G-SDI	HD-SDI							
X981UHD-2	N8000-8866	N8000-8865	SB-09HC*	SB-04HC	SB-01HC	SB-08DC*	SB-07BC	ST-801	SP-RM1 SP-TF1	KT-RC2	NP01SW	
X841UHD-2								ST-651				
X651UHD-2								ST-5520				
X551UHD												

* Up to 4K 60Hz
Local options: please contact your supplier.

MultiSync, NaViSet, SpectraView and MultiProfiler are trademarks or registered trademarks of NEC Display Solutions, Ltd. in Japan, the United States and other countries.
Microsoft is a registered trademark or trademark of Microsoft Corporation in the United States and/or other countries.
The terms HDMI and HDMI High-Definition Multimedia Interface, and the HDMI Logo are trademarks or registered trademarks of HDMI Licensing LLC in the United States and other countries.
DisplayPort and DisplayPort Compliance Logo are trademarks owned by the Video Electronics Standards Association in the United States and other countries.
HDBaseT™ and the HDBaseT Alliance logo are trademarks of the HDBaseT Alliance.
CRESTRON and CRESTRON ROOMVIEW are trademarks or registered trademarks of Crestron Electronics, Inc.
AMX is a trademark or registered trademark of AMX in the United States and other countries.
Trademark PULink is a trademark applied for trademark rights in Japan, the United States of America and other countries and areas.
VESA is a trademark of a nonprofit organization, Video Electronics Standard Association.
Ethernet is either a registered trademark or trademark of Fujii Xerox Co., Ltd. Android is a trademark of Google Inc.
All other trademarks are the property of their respective owners. The images in this brochure are samples.
All specifications are subject to change without notice. April 2016

NEC LCD Professional Large Format Displays

MultiSync® X981UHD-2 / X841UHD-2 / X651UHD-2 / X551UHD

